



## CHALLENGER 3D BUTT HINGES GASKET PREPARATION (EUROFIX TYPE)

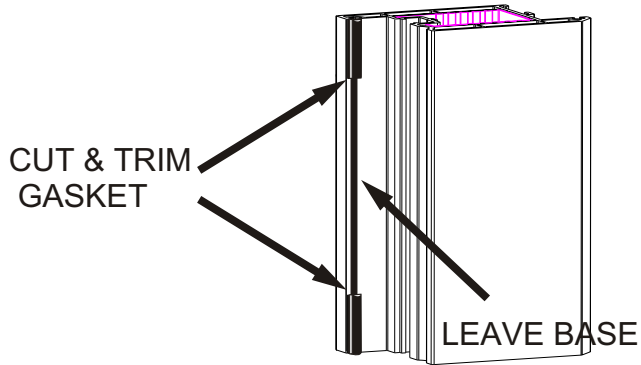

IN SOME CASES, IT IS NECESSARY TO REMOVE THE GASKET BENEATH THE HINGE FLAG.


LEAVE THE GASKET BASE IN PLACE TO STOP THE GASKET SHRINKING AWAY FROM THE FLAG.

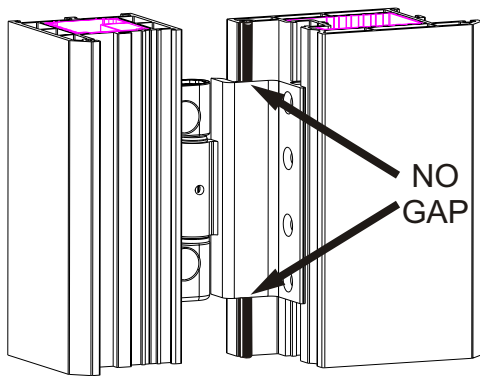

CARE MUST BE TAKEN TO CUT THE GASKET TIGHT TO EITHER EDGE OF THE HINGE FLAG.

IT IS **NOT** ESSENTIAL TO RE-SEAL THIS AREA FOR INWARD OPENING DOORS.

IT IS RECOMMENDED THAT THIS AREA IS RE-SEALED FOR OUTWARD OPENING DOORS.

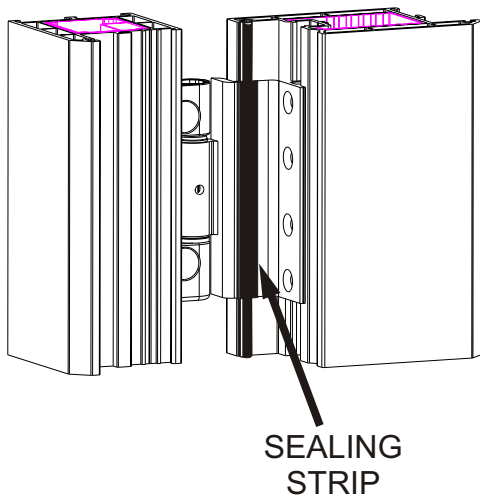

IF REQUIRED, A RE-SEALING STRIP IS AVAILABLE.

THIS IS ADHESIVE BACKED AND IS SUPPLIED IN STRIPS OF 96 PADS.

THESE ARE SUPPLIED AS A SEPARATE ITEM TO BE FIXED BY THE CUSTOMER

| Part No.   | Description                     |
|------------|---------------------------------|
| DACGBL0001 | 1mm X 10mm x 100mm Adhesive Pad |
|            |                                 |
|            |                                 |